

RoadRunner HD™ IP Cameras - Interior



Description	Forward-Facing	Forward-Facing Dome	360° Camera	Tapered Dome
Audio Recording:	-	✓	-	✓
Low-Light:	✓	✓	✓	✓
Vandal-Resistant:	✓	✓	✓	✓
High Resolution, PoE:	✓	✓	✓	✓
Auto-Connect:	✓	✓	✓	✓
Resolution:	4K (3840x2160) F-HD (1920x1080) HD (1280x720) W-D1 (854x480) QHD (640x360)	F-HD (1920x1080) HD (1280x720) W-D1 (864x480) QHD (640x360) W-CIF (432x240)	5MP (2560x2048) HD (1536x1536) QHD (640x512) W-CIF (512x512)	F-HD (1920x1080)* HD (1280x720) W-D1 (864x480) QHD (640x360) W-CIF (432x240)
Field of View (FOV):	4K: 70° Model: H: 72.5°; V: 40° 100° Model: H:102.5°; V:53° 115° Model: H:116°; V:63° HD: H: 35° - 95°; V: 20° - 51° (3.0 - 8.5mm Varifocal lens)	H:101°; V:61°	H:180°; V:180°	85° Model: H: 81°; V: 43° 100° Model: H:101°; V:61° 115° Model: H:115°; V:69°
Min. Illumination (Color):	0.15 Lux @ F 1.2	0.07 Lux @ F 2.0	0.08 Lux @ F 2.2	0.07 Lux @ F 2.0
Min. Illumination (B&W):	0.01 Lux @ F 1.2	0 Lux @ F 2.0	0.003 Lux @ F 2.2	0 Lux @ F 2.0
S/N Ratio:	>52dB	31.2dB	>45dB	31.2dB
CCD:	1/2.7" CMOS	1/2.9" CMOS	1/1.8" CMOS	1/2.9" CMOS
Dimension (WxHxD):	Adjustable	100mm x 65.4mm x 140mm 100mm x 266mm x 140mm (w/ mount)	155mm x 48mm	100mm x 65.4mm x 140mm
Additional Features:	IP66 Rated; Fully Adjustable Mount	IP66 Rated	IP66 Rated; De-Warping, ePTZ and Panoramic Modes	IP66 Rated Automatic IR Cut Filter
Model:	RR-4KCF170 / RR-4KCF270 RR-4KCF1100 / RR-4KCF2100 RR-4KCF1115 / RR-4KCF2115 RR-HDCF1 / RR-HDCF2	RR-HDCTDF100	RR-HDC360	RR-HDCTDIRA85 RR-HDCTDIRA100 RR-HDCTDIRA115

Interior Sample View



4K or 1080p High Definition

Rugged

Auto-Connect







Description	Tapered Dome	Wedge
Low-Light:	✓	✓
Vandal-Resistant:	✓	✓
High Resolution, PoE:	✓	✓
Auto-Connect:	✓	✓
Varifocal Lens:	-	✓
Resolution:	F-HD (1920x1080) HD (1280x720) W-D1 (864x480) QHD (640x360) W-CIF (432x240)	F-HD (1920x1080) HD (1280x720) W-D1 (864x480) QHD (640x360) W-CIF (432x240)
Field of View (FOV):	85° Model: H: 81°; V: 43° 100° Model: H:101°; V:61° 115° Model: H:115°; V:69°	H: 35° - 95°; V: 20° - 51° (3.0 - 8.5mm Varifocal lens)
Min. Illumination (Color):	0.07 Lux @ F 2.0	0.15 Lux @ F 1.2
Min. Illumination (B&W):	0 Lux @ F 2.0	0.01 Lux @ F 1.2
S/N Ratio:	31.2dB	>52dB
CCD:	1/2.9" CMOS	1/2.7" CMOS
Dimension (WxHxD):	100mm x 65.4mm x 140mm	103mm x 92mm x 172mm
Outdoor Rating:	IP68	IP66
Additional Features:	UV Coated Dome	Tempered Glass (Optional)
Model:	RR-HDCTD85 RR-HDCTD100 RR-HDCTD115	RR-HDCW1-CS RR-HDCW1-SS RR-HDCW1-FV

CS = Curbside; SS = Streetside; FV = Front View

Sample Camera Placement

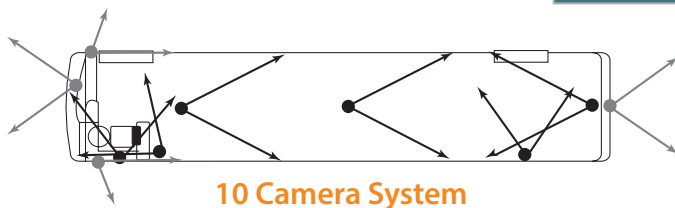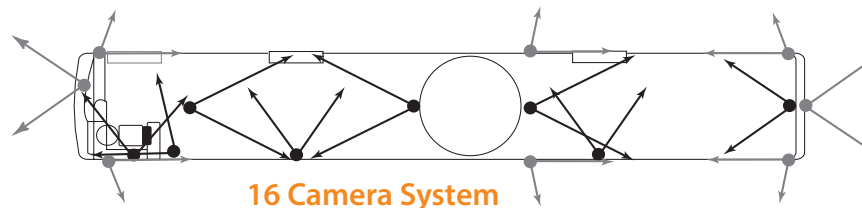

24000-35th Avenue Southeast - Bothell, WA 98021

Toll Free: 888-AVT-USA1; Tel: 425-483-7100; Fax: 425-483-7200

sales@apollovideo.com | www.apollovideo.com